













## STILE & RAIL DOOR ELEVATIONS


JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\*                      Top Rail: 6"                      Stile: 6"  
    Bottom Rail: 10"                      Mid Rail: 3"

\* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.

**SS1042**     **SA1042**     **SR1042**

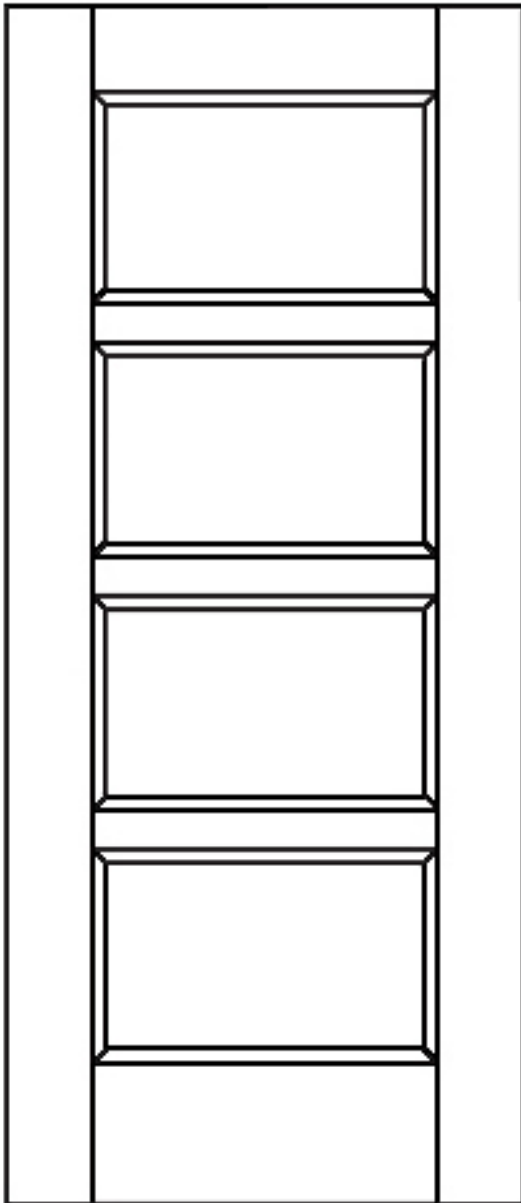

**Dimensions**

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Mid Rail: \_\_\_\_\_

Panel Dimensions are Equal

**Sticking**

- Ovolo
- Square
- Ogee
- Other – Supply Drawing

**Panels<sup>#</sup>**

- Raised
- Flat

**Glass \*\* (Advise which panels are glass)**

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT <input type="checkbox"/> Other <input type="checkbox"/> N/A	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 3/16" Clear Firelight® <input type="checkbox"/> 1/4" Wire <input type="checkbox"/> Other: _____

\*\*Glass opening dimensions will vary depending on prefit door size

\*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

#Panel dimensions will vary depending on prefit door size



## STILE & RAIL DOOR ELEVATIONS

JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\* Top Rail: 6" Stile: 6" Mid Rail: 3"  
Bottom Rail: 10" Mullion: 3"

\* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.  
 (C/L of Lock Rail Assembly will match frame manufacturer standard C/L of strike location unless otherwise noted)

**SS1051**

### Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Mid Rail: \_\_\_\_\_

Mullion: \_\_\_\_\_

C/L of Lock Rail Assembly from TOD: \_\_\_\_\_

Lock Rail Panel Height: \_\_\_\_\_  
 (Standard Lock Rail Panel Height is 8")

### Sticking

- Ovolo
- Square
- Ogee
- Other – Supply Drawing

### Panels<sup>##</sup>

- Raised
- Flat


### Glass\*\* (Advise which panels are glass)

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 3/16" Clear Firelight®
<input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Wire	
<input type="checkbox"/> N/A	<input type="checkbox"/> Other: _____	

\*\*Glass opening dimensions will vary depending on prefit door size

\*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

##Panel dimensions not specified will vary depending on prefit door size

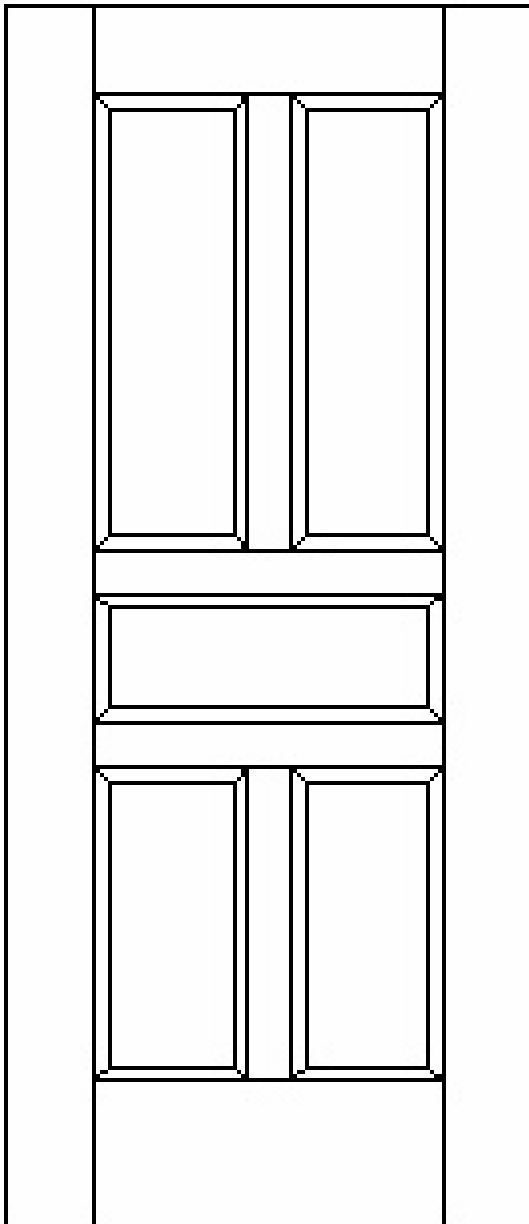

Lock Rail Panel Height

C/L Lock Rail Assembly





## STILE & RAIL DOOR ELEVATIONS


JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\* Top Rail: 6" Stile: 6" Mid Rail: 3"  
Bottom Rail: 10" Mullion: 3"

\* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.  
 (C/L of Lock Rail Assembly will match frame manufacturer standard C/L of strike location unless otherwise noted)

**SS1061**

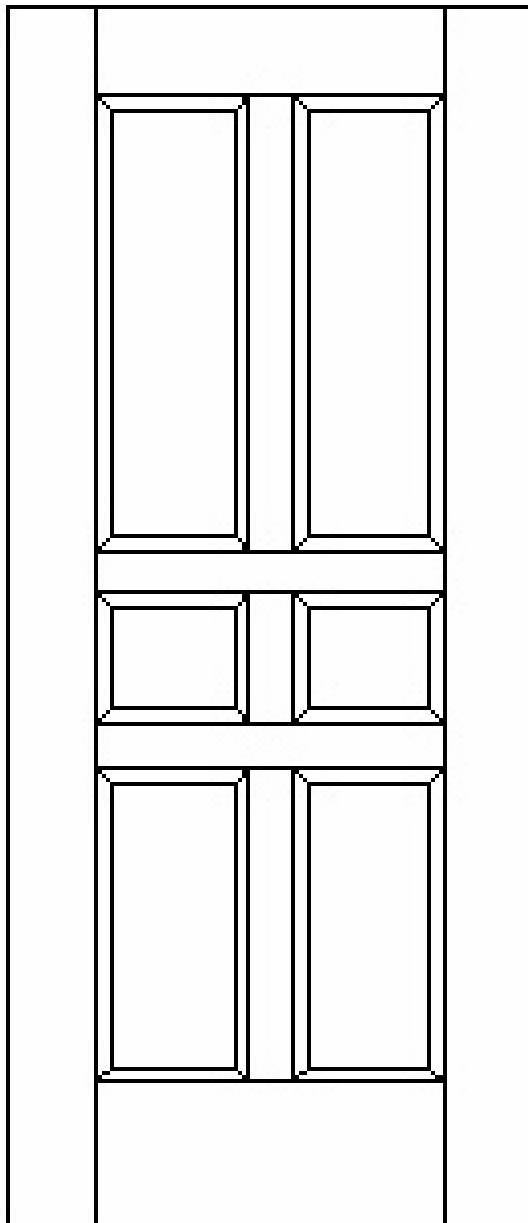

### Dimensions

- Standard – see above
- Custom – fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Mullion: \_\_\_\_\_

Mid Rail: \_\_\_\_\_

C/L of Lock Rail Assembly from TOD: \_\_\_\_\_

Lock Rail Panel Height: \_\_\_\_\_  
 (Standard Lock Rail Panel Height is 8")

### Sticking

- Ovolo
- Square
- Ogee
- Other – Supply Drawing

### Panels##

- Raised
- Flat

### Glass\*\* ( Advise which panels are glass)

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 3/16" Clear Firelight®
<input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Wire	
<input type="checkbox"/> N/A	<input type="checkbox"/> Other: _____	

\*\*Glass opening dimensions will vary depending on prefit door size  
 \*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass  
 ##Panel dimensions not specified will vary depending on prefit door size



## STILE & RAIL DOOR ELEVATIONS


JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\* Top Rail: 6" Stile: 6" Mid Rail: 3"  
Bottom Rail: 10" Mullion: 3" Lock Rail: 8 3/4"

\* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.  
 (C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

**SS1062**

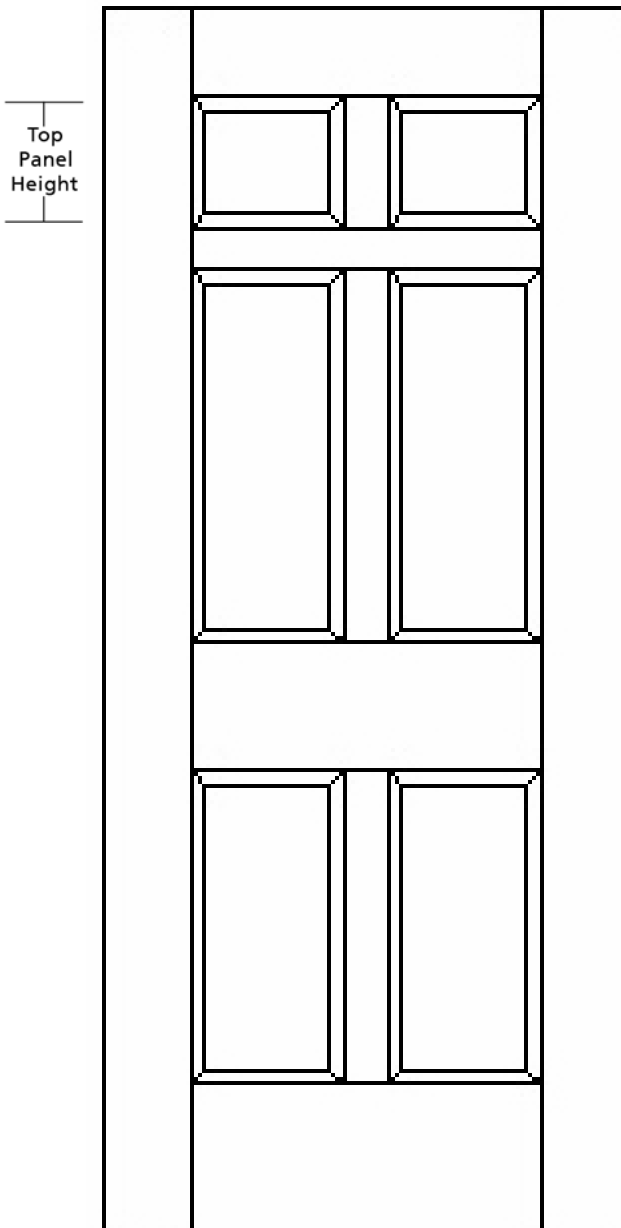

### Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Mullion: \_\_\_\_\_

Mid Rail: \_\_\_\_\_

Lock Rail: \_\_\_\_\_

Top Panel Height: \_\_\_\_\_

(Standard Top Panel Height is 8")

C/L of Lock Rail from TOD: \_\_\_\_\_

### Sticking

- Ovolo
- Square
- Ogee
- Other – Supply Drawing

### Panels<sup>##</sup>

- Raised
- Flat

### Glass \*\* (Advise which panels are glass)

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 3/16" Clear Firelight®
<input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Wire	
<input type="checkbox"/> N/A	<input type="checkbox"/> Other: _____	

\*\*Glass opening dimensions will vary depending on prefit door size

\*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

##Panel dimensions not specified will vary depending on prefit door size



### STILE & RAIL DOOR ELEVATIONS


JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\*                      Top Rail: 6"                      Stile: 6"                      Lock Rail: 8 3/4"  
   Bottom Rail: 10"                      Mullion: 3"

\* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.  
(C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

**SS1063**

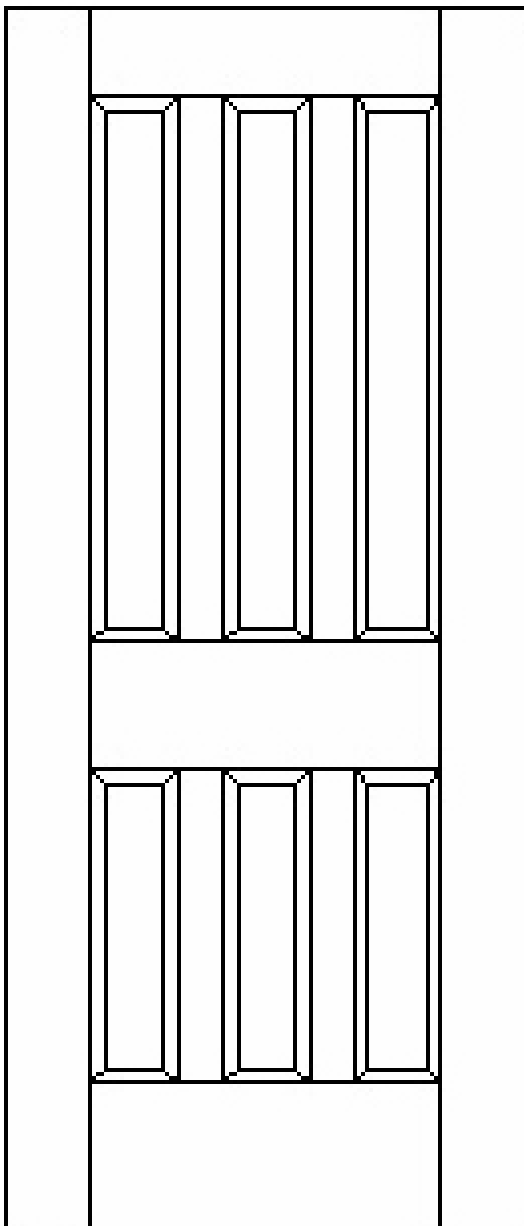

#### Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Mullion: \_\_\_\_\_

Lock Rail: \_\_\_\_\_

C/L of Lock Rail from TOD: \_\_\_\_\_

#### Sticking

- Ovolo
- Square
- Ogee
- Other – Supply Drawing

#### Panels<sup>#</sup>

- Raised
- Flat

#### Glass\*\* (Advise which panels are glass)

Supplied By:	Thickness/Type
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered*** <input type="checkbox"/> 3/16" Clear Firelight®
<input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Wire
<input type="checkbox"/> N/A	<input type="checkbox"/> Other: _____

\*\*Glass opening dimensions will vary depending on prefit door size

\*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

<sup>#</sup>Panel dimensions will vary depending on prefit door size







## STILE & RAIL DOOR ELEVATIONS


JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\*                      Top Rail: 6"                      Stile: 6"  
    Bottom Rail: 10"                      Glass Thickness: 1/4"

\* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.

**SS3011**     **SA3011**     **SR3011**

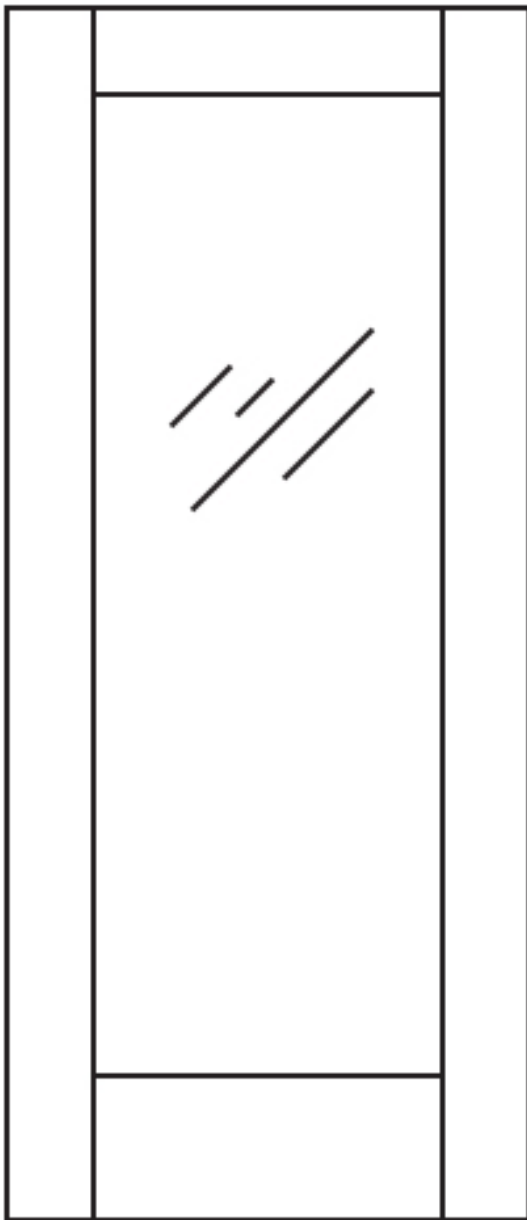

### Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

### Sticking

- Ovolo
- Square
- Ogee
- Other – Supply Drawing

### Glass\*\*

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 3/16" Clear Firelight®
<input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Wire	<input type="checkbox"/> Other: _____

\*\*Glass opening dimensions will vary depending on prefit door size

\*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass





### STILE & RAIL DOOR ELEVATIONS

JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\*


Top Rail: 6"  
Bottom Rail: 10"

Stile: 6"  
Muntin: 1/2"

Glass Thickness: 1/4"

\* Non-Rated Only

SS3022    SA3022    SR3022

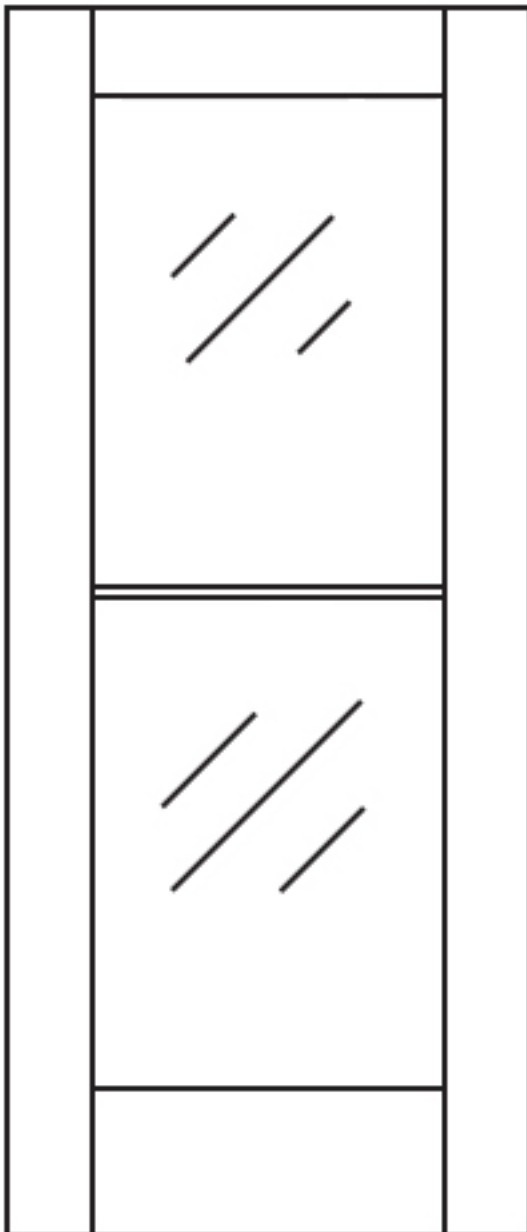

#### Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Glass Opening Dimensions are Equal

#### Sticking

- Ovolo
- Square
- Ogee
- Other – Supply Drawing

#### Glass\*\*

Supplied By:	Thickness/Type
<input type="checkbox"/> VT <input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Tempered*** <input type="checkbox"/> 1/4" Wire <input type="checkbox"/> Other: _____

\*\*Glass opening dimensions will vary depending on prefit door size

\*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass



### STILE & RAIL DOOR ELEVATIONS

JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\*


Top Rail: 6"  
Bottom Rail: 10"

Stile: 6"  
Muntin: 1/2"

Glass Thickness: 1/4"

\* Non-Rated Only

SS3032     SA3032     SR3032

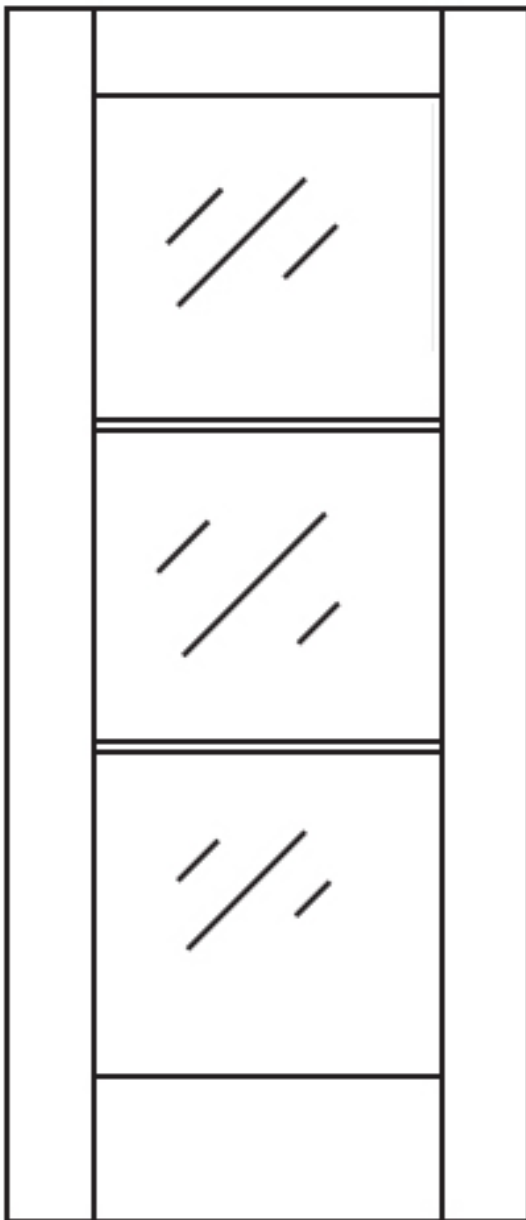

#### Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Glass Opening Dimensions are Equal

#### Sticking

- Ovolo
- Square
- Ogee
- Other – Supply Drawing

#### Glass\*\*

Supplied By:	Thickness/Type
<input type="checkbox"/> VT <input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Tempered*** <input type="checkbox"/> 1/4" Wire <input type="checkbox"/> Other: _____

\*\*Glass opening dimensions will vary depending on prefit door size

\*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass





## STILE & RAIL DOOR ELEVATIONS


JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\*                      Top Rail: 6"                      Stile: 6"                      Glass Thickness: 1/4"  
    Bottom Rail: 10"                      Muntin: 1/2"

\*Non-Rated Only

**SS3042**

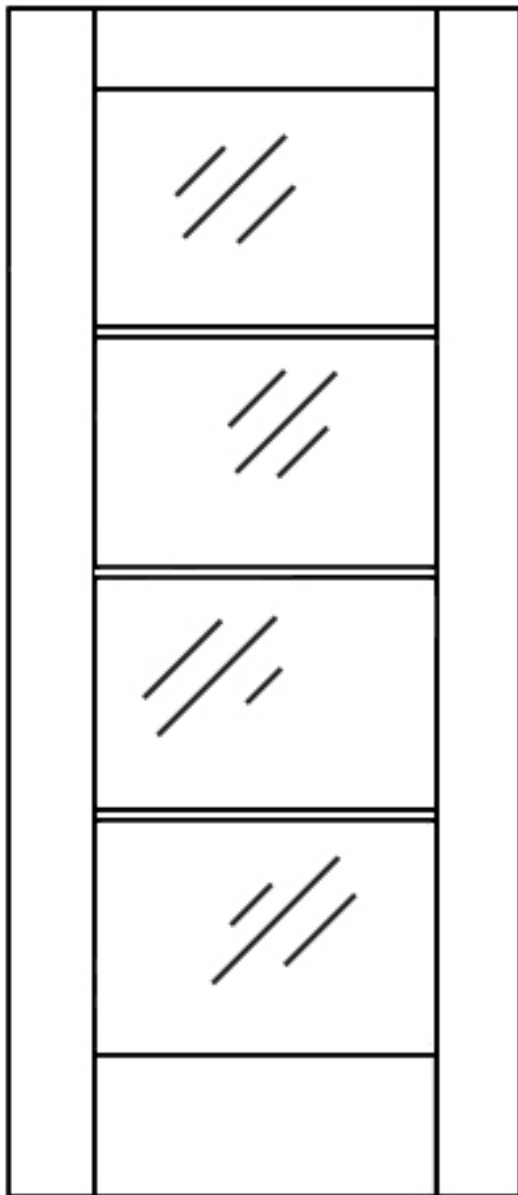

### Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Glass Opening Dimensions are Equal

### Sticking

- Ovolo
- Square
- Ogee
- Other – Supply Drawing

### Glass\*\*

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT <input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 1/4" Wire <input type="checkbox"/> Other: _____

\*\*Glass opening dimensions will vary depending on prefit door size

\*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass





### STILE & RAIL DOOR ELEVATIONS


JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\*                      Top Rail: 6"                      Stile: 6"                      Glass Thickness: 1/4"  
   Bottom Rail: 10"                      Muntin: 1/2"

\*Non-Rated Only

**SS3061**

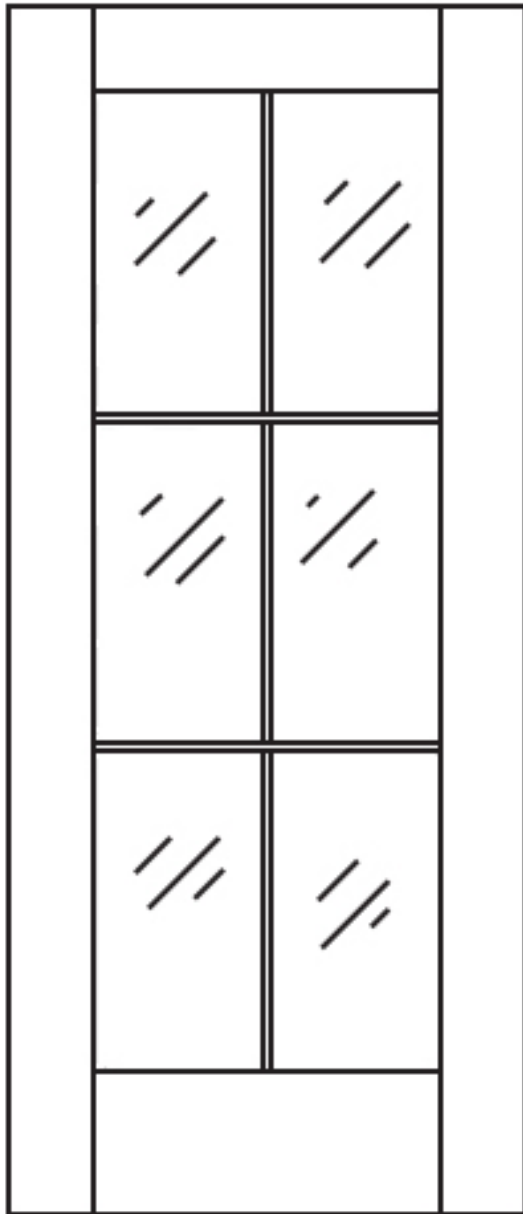

#### Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Glass Opening Dimensions are Equal

#### Sticking

- Ovolo
- Square
- Ogee
- Other – Supply Drawing

#### Glass\*\*

Supplied By:	Thickness/Type
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered*** <input type="checkbox"/> 1/4" Wire
<input type="checkbox"/> Other	<input type="checkbox"/> Other: _____

\*\*Glass opening dimensions will vary depending on prefit door size

\*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass







## STILE & RAIL DOOR ELEVATIONS


JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\*                      Top Rail: 6"                      Stile: 6"                      Glass Thickness: 1/4"  
    Bottom Rail: 10"                      Muntin: 1/2"

\*Non-Rated Only

**SS3091**

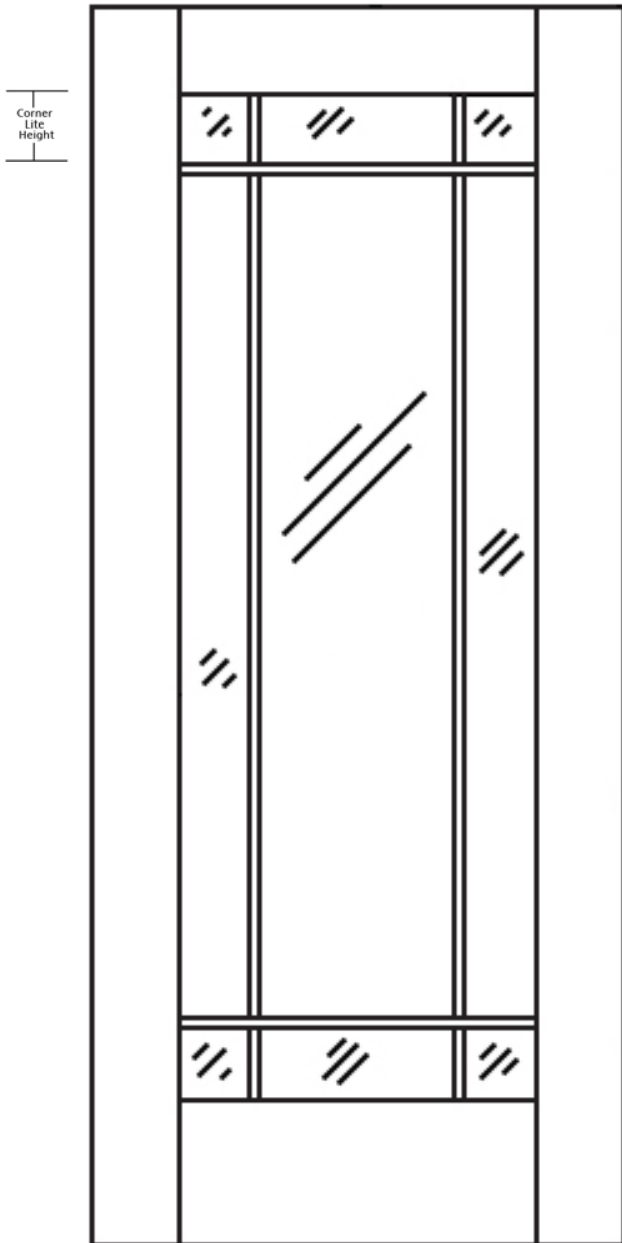

### Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Corner Lite Height: \_\_\_\_\_  
(4" Minimum)

Corner Lite Width: \_\_\_\_\_  
(4" Minimum)

### Sticking

- Ovolo
- Square
- Ogee
- Other – Supply Drawing

### Glass\*\*

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT <input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 1/4" Wire <input type="checkbox"/> Other: _____

\*\*Glass opening dimensions will vary depending on prefit door size

\*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass









### STILE & RAIL DOOR ELEVATIONS


JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\*                      Top Rail: 6"                      Stile: 6"                      Glass Thickness: 1/4"  
   Bottom Rail: 10"                      Lock Rail: 8 3/4"

\* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.  
(C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

SS5021     SA5021     SR5021

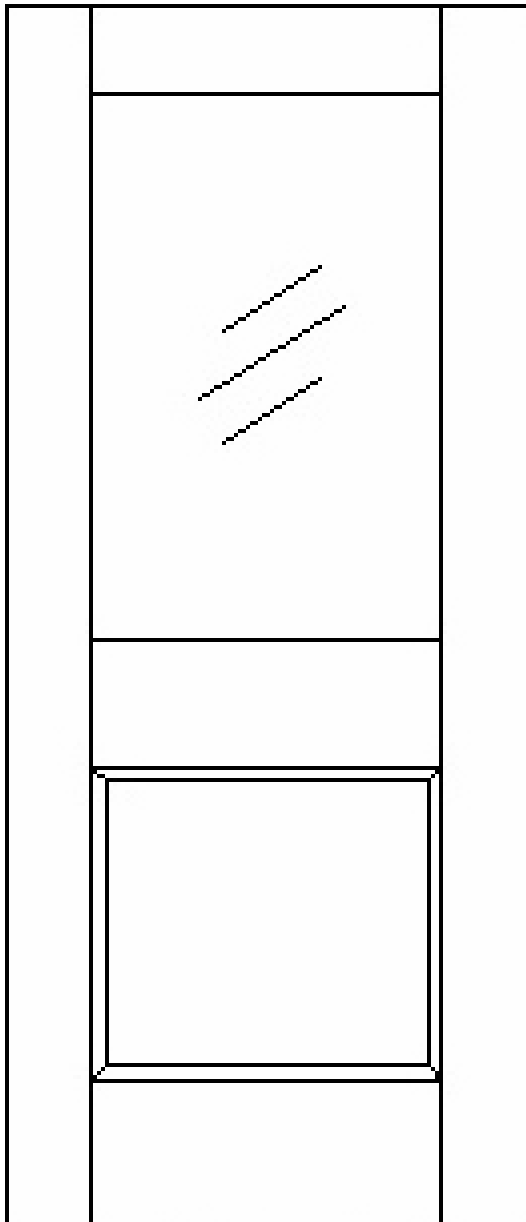

#### Dimensions

Standard - see above

Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Lock Rail: \_\_\_\_\_

C/L of Lock Rail from TOD: \_\_\_\_\_

#### Sticking

Ovolo

Square

Ogee

Other – Supply Drawing

#### Panels<sup>#</sup>

Raised

Flat

#### Glass\*\*

Supplied By:	Thickness/Type
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered*** <input type="checkbox"/> 3/16" Clear Firelight®
<input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Wire <input type="checkbox"/> Other: _____

\*\*Glass opening dimensions will vary depending on prefit door size

\*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

<sup>#</sup>Panel dimensions will vary depending on prefit door size



## STILE & RAIL DOOR ELEVATIONS


JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\*                      Top Rail: 6"                      Stile: 6"                      Mullion: 3"  
    Bottom Rail: 10"                      Lock Rail: 8 3/4"                      Glass Thickness: 1/4"

\* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.  
 (C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

**SS5031**     **SA5031**     **SR5031**

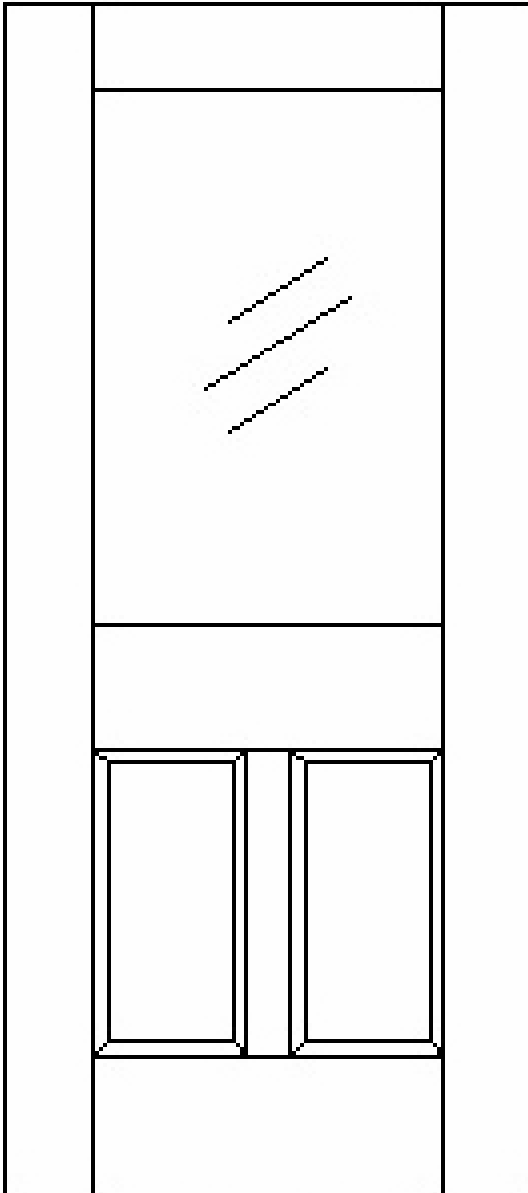

### Dimensions

- Standard – see above
- Custom – fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Mullion: \_\_\_\_\_

Lock Rail: \_\_\_\_\_

C/L of Lock Rail from TOD: \_\_\_\_\_

### Sticking

- Ovolo
- Square
- Ogee
- Other – Supply Drawing

### Panels<sup>#</sup>

- Raised
- Flat

### Glass\*\*

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 3/16" Clear Firelight®
<input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Wire	
	<input type="checkbox"/> Other: _____	

\*\*Glass opening dimensions will vary depending on prefit door size

\*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

<sup>#</sup>Panel dimensions will vary depending on prefit door size



## STILE & RAIL DOOR ELEVATIONS

JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\* Top Rail: 6" Stile: 6" Glass Thickness: 1/4"  
Bottom Rail: 10" Mullion: 3"

\* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.  
 (C/L of Lock Rail Assembly will match frame manufacturer standard C/L of strike location unless otherwise noted)

**SS5041**   
  **SA5041**   
  **SR5041**

### Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_


Hinge and Lock Stiles: \_\_\_\_\_

Mullion: \_\_\_\_\_

Mid Rail: \_\_\_\_\_

C/L of Lock Rail Assembly from TOD: \_\_\_\_\_

Lock Rail Panel Height: \_\_\_\_\_  
 (Standard Lock Rail Panel Height is 8")

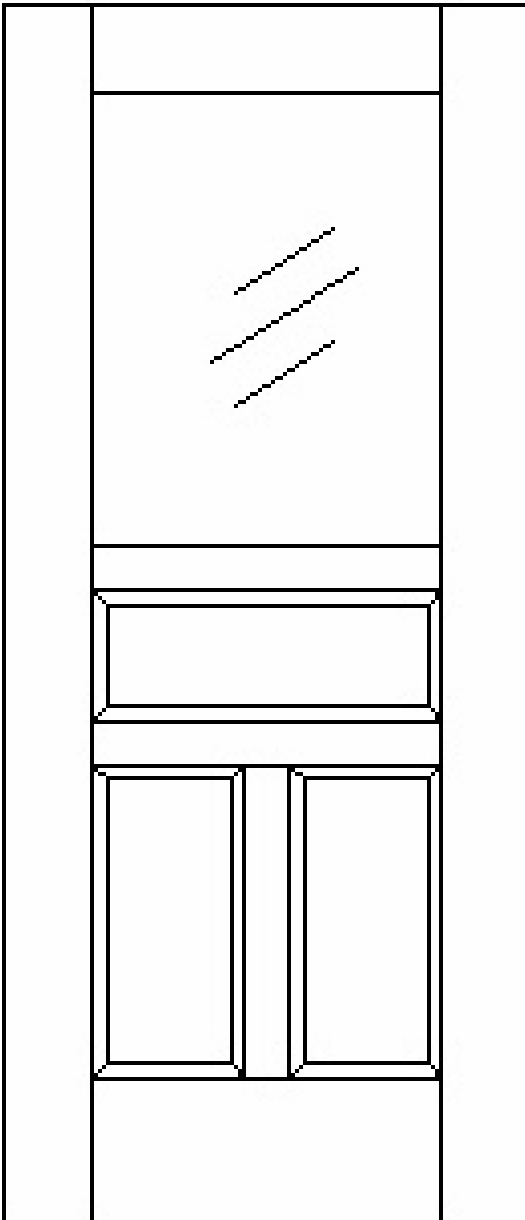

Lock Rail Panel Height

Lock Rail Assembly  
C/L

### Sticking

- Ovolo
- Square
- Ogee
- Other – Supply Drawing

### Panels##

- Raised
- Flat

### Glass\*\*

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 3/16" Clear Firelight®
<input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Wire	
	<input type="checkbox"/> Other: _____	

\*\*Glass opening dimensions will vary depending on prefit door size

\*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

##Panel dimensions not specified will vary depending on prefit door size



## STILE & RAIL DOOR ELEVATIONS


JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\* Top Rail: 6" Stile: 6" Lock Rail: 8 3/4"  
Bottom Rail: 10" Muntin: 1/2" Glass Thickness: 1/4"

\* Non-Rated Only  
 (C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

**SS5071**

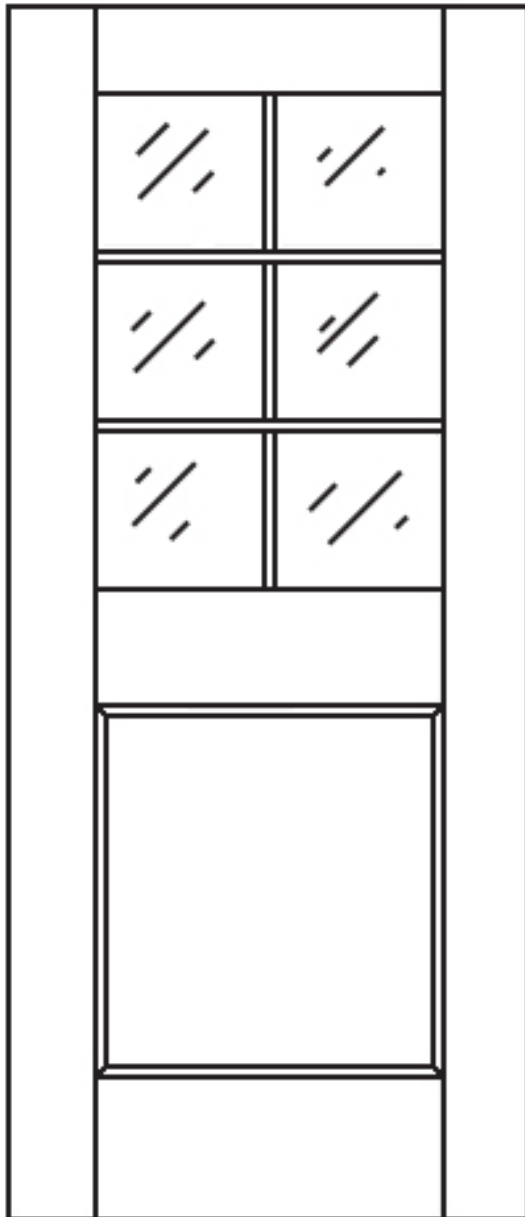

### Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Mullion: \_\_\_\_\_

Mid Rail: \_\_\_\_\_

Lock Rail: \_\_\_\_\_

C/L of Lock Rail from TOD: \_\_\_\_\_

Glass Opening Dimensions are Equal

### Sticking

- Ovolo
- Square
- Ogee
- Other – Supply Drawing

### Panels<sup>#</sup>

- Raised
- Flat

### Glass\*\*

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 1/4" Wire
<input type="checkbox"/> Other	<input type="checkbox"/> Other: _____	

\*\*Glass opening dimensions will vary depending on prefit door size

\*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

#Panel dimensions will vary depending on prefit door size



## STILE & RAIL DOOR ELEVATIONS


JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\* Top Rail: 6" Stile: 6" Muntin: 1/2"  
Bottom Rail: 10" Lock Rail: 8 3/4" Glass Thickness: 1/4"

\*Non-Rated Only  
 (C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

**SS5101**

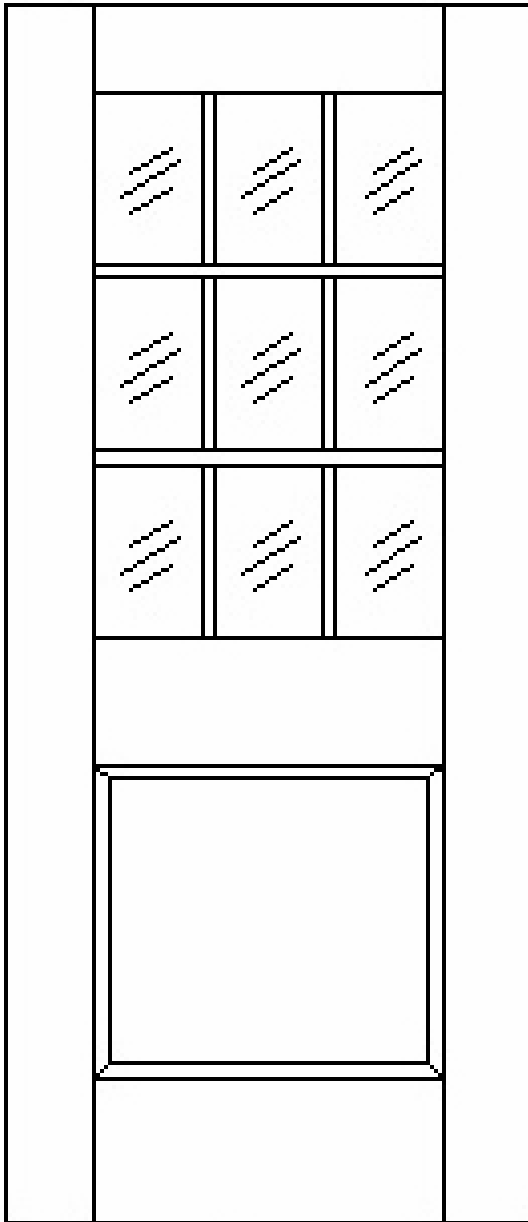

### Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Lock Rail: \_\_\_\_\_

C/L of Lock Rail from TOD: \_\_\_\_\_

Glass Opening Dimensions are Equal

### Sticking

- Ovolo
- Square
- Ogee
- Other – Supply Drawing

### Panels<sup>#</sup>

- Raised
- Flat

### Glass<sup>\*\*\*</sup>

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered <sup>***</sup>	<input type="checkbox"/> 1/4" Wire
<input type="checkbox"/> Other	<input type="checkbox"/> Other: _____	

<sup>\*\*</sup>Glass opening dimensions will vary depending on prefit door size

<sup>\*\*\*</sup>If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

<sup>#</sup>Panel dimensions will vary depending on prefit door size



## STILE & RAIL DOOR ELEVATIONS


JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\*  
 Top Rail: 6"                      Stile: 6"                      Muntin: 1/2"  
 Bottom Rail: 10"                  Mullion: 3"                  Lock Rail: 8 3/4"  
 Glass Thickness: 1/4"

\*Non-Rated Only  
 (C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

**SS5111**

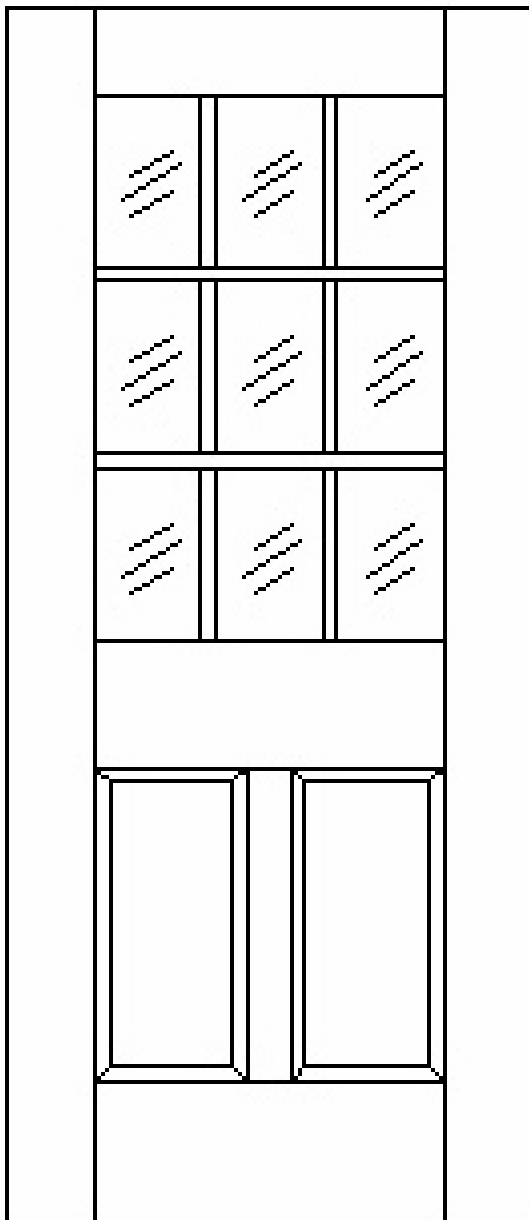

### Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Mullion: \_\_\_\_\_

Lock Rail: \_\_\_\_\_

C/L of Lock Rail from TOD: \_\_\_\_\_

Panel Dimensions are Equal  
 Glass Opening Dimensions are Equal

### Sticking

- Ovolo
- Square
- Ogee
- Other – Supply Drawing

### Panels<sup>#</sup>

- Raised
- Flat

### Glass\*\*

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT <input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 1/4" Wire <input type="checkbox"/> Other: _____

\*\*Glass opening dimensions will vary depending on prefit door size  
 \*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass  
 #Panel dimensions will vary depending on prefit door size



## STILE & RAIL DOOR ELEVATIONS


JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\* Top Rail: 6" Stile: 6" Lock Rail: 8 3/4"  
Bottom Rail: 10" Muntin: 1/2" Glass Thickness: 1/4"

\*Non-Rated Only  
 (C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

**SS5131**

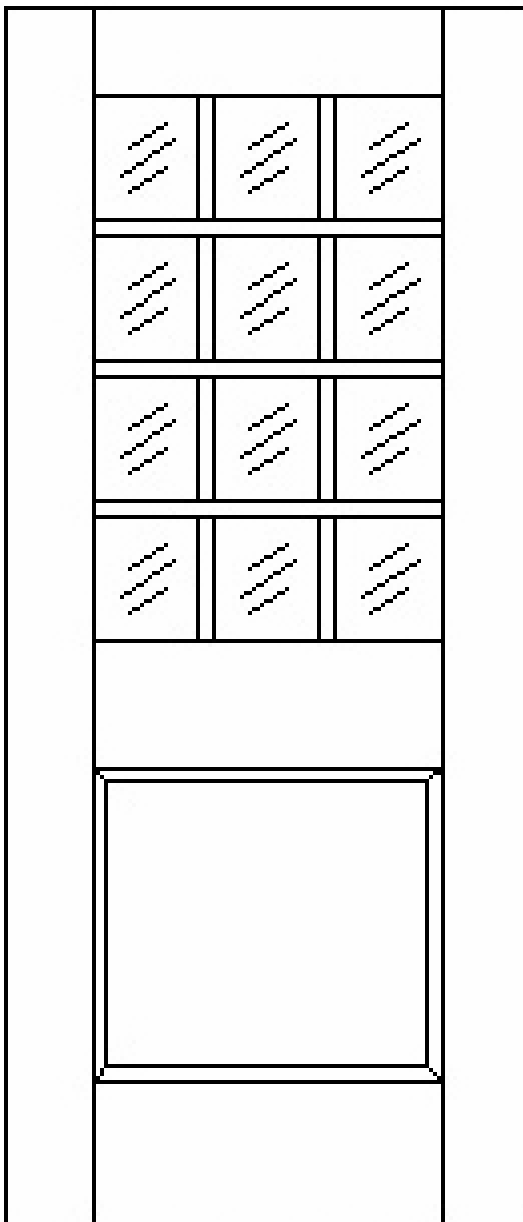

### Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Lock Rail: \_\_\_\_\_

C/L of Lock Rail from TOD: \_\_\_\_\_

Glass Opening Dimensions are Equal

### Sticking

- Ovolo
- Square
- Ogee
- Other – Supply Drawing

### Panels<sup>#</sup>

- Raised
- Flat

### Glass\*\*

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 1/4" Wire
<input type="checkbox"/> Other	<input type="checkbox"/> Other: _____	

\*\*Glass opening dimensions will vary depending on prefit door size

\*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

#Panel dimensions will vary depending on prefit door size







### STILE & RAIL DOOR ELEVATIONS

JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_


STANDARDS:\*

Top Rail: 6"  
Bottom Rail: 10"

Stile: 6"  
Lock Rail: 8 3/4"

\*Non-Rated Only  
(C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

**SS7021**

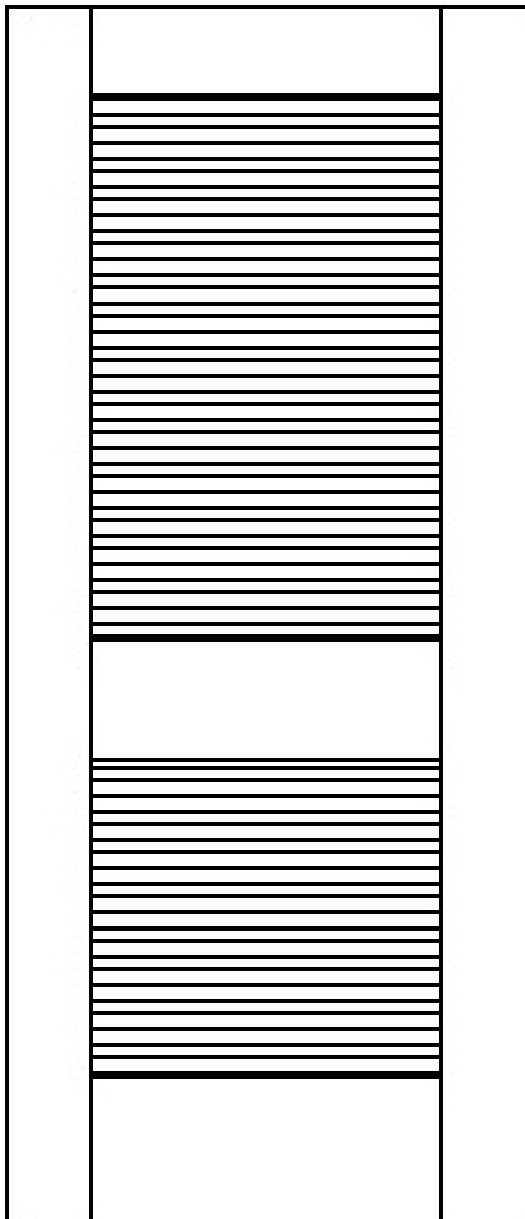

#### Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Lock Rail: \_\_\_\_\_

C/L of Lock Rail from TOD: \_\_\_\_\_

#### Sticking

- Ovolo
- Square
- Ogee – Not Available on 1 3/8" thick doors
- Other – Supply Drawing

#### Louver

- Chevron (Inverted V) - Standard
- Round Slat (Flat Slat)\*\* - Blind side outside
- Round Slat (Flat Slat)\*\* - Blind side inside
- Louver by Other – Cutout only

\*\*Round Slat Louvers are outsourced and will be supplied with vendor's standard sticking – Contact VT if further clarification is needed



### STILE & RAIL DOOR ELEVATIONS

JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_


STANDARDS:\*

Top Rail: 6"  
Bottom Rail: 10"

Stile: 6"  
Lock Rail: 8 3/4"

\*Non-Rated Only  
(C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

**SS9021**

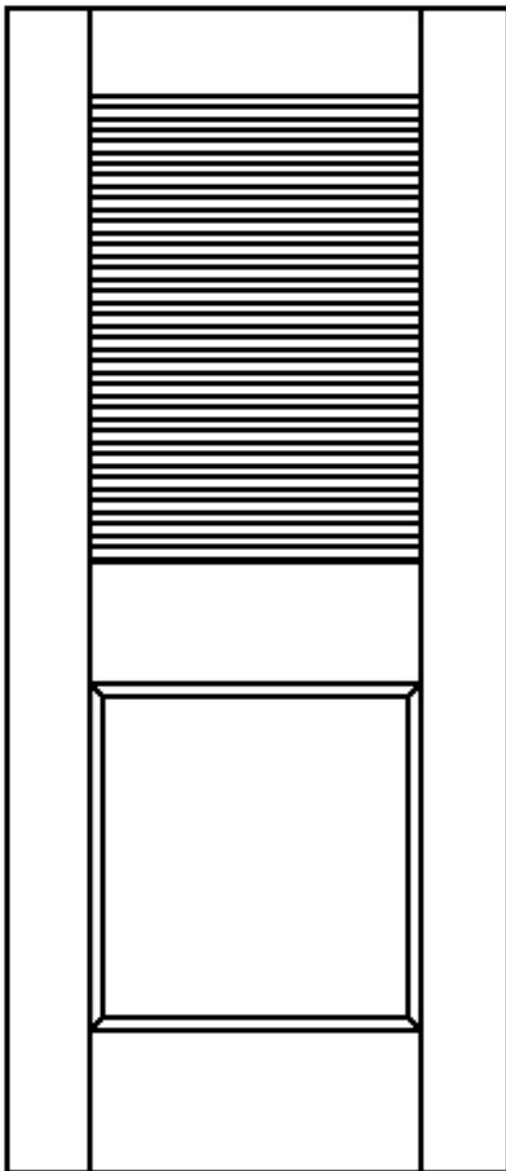

#### Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Lock Rail: \_\_\_\_\_

C/L of Lock Rail from TOD: \_\_\_\_\_

#### Sticking

- Ovolo
- Square
- Ogee – Not Available on 1 3/8" thick doors
- Other – Supply Drawing

#### Louver

- Chevron (Inverted V) - Standard
- Round Slat (Flat Slat)\*\* - Blind side outside
- Round Slat (Flat Slat)\*\* - Blind side inside
- Louver by Other – Cutout only

#### Panels#

- Raised
- Flat

\*\*Round Slat Louvers are outsourced and will be supplied with vendor's standard sticking – Contact VT if further clarification is needed

#Panel dimensions will vary depending on prefit door size



### STILE & RAIL DOOR ELEVATIONS

JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_


STANDARDS:\*

Top Rail: 6"  
Bottom Rail: 10"

Stile: 6"  
Lock Rail: 8 3/4"

\*Non-Rated Only  
(C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

**SS9022**

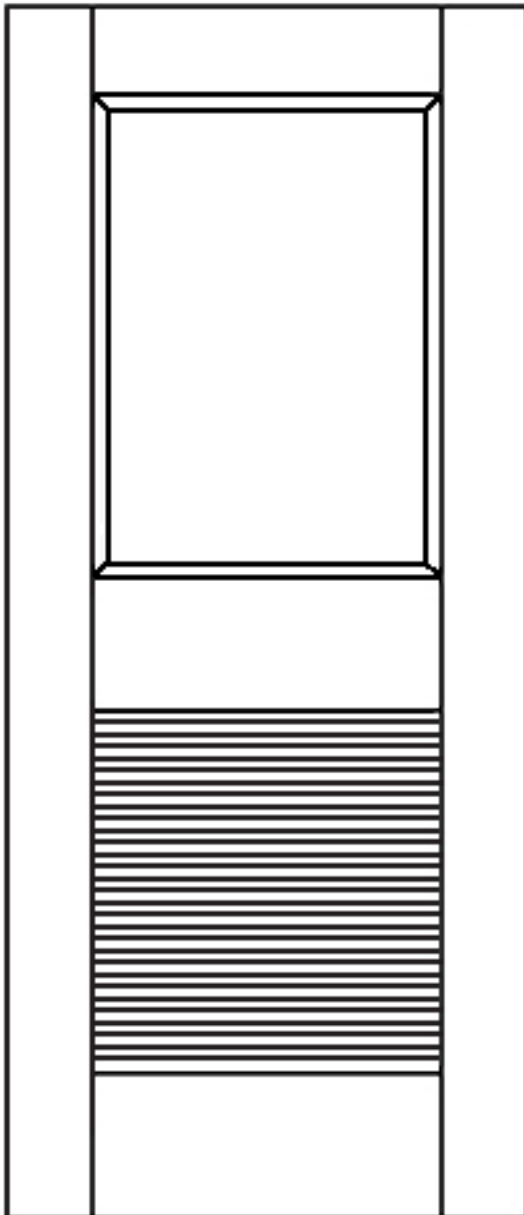

#### Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Lock Rail: \_\_\_\_\_

C/L of Lock Rail from TOD: \_\_\_\_\_

#### Sticking

- Ovolo
- Square
- Ogee – Not Available on 1 3/8" thick doors
- Other – Supply Drawing

#### Louver

- Chevron (Inverted V) - Standard
- Round Slat (Flat Slat)\*\* - Blind side outside
- Round Slat (Flat Slat)\*\* - Blind side inside
- Louver by Other – Cutout only

#### Panels#

- Raised
- Flat

\*\*Round Slat Louvers are outsourced and will be supplied with vendor's standard sticking – Contact VT if further clarification is needed

#Panel dimensions will vary depending on prefit door size



### STILE & RAIL DOOR ELEVATIONS


JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:*	Top Rail: 6"	Stile: 6"	Mid Rail: 3"
	Bottom Rail: 10"	Mullion: 3"	Lock Rail: 8 3/4"

\* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.

Custom

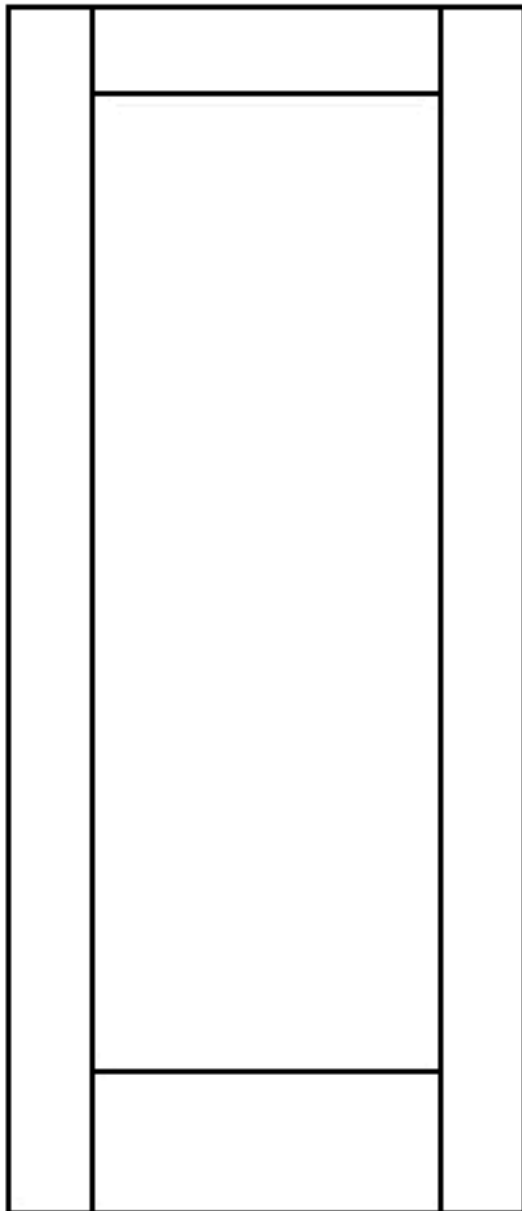

#### Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Mid Rail: \_\_\_\_\_

Mullion: \_\_\_\_\_

Lock Rail: \_\_\_\_\_

#### Sticking

- Ovolo
- Square
- Ogee
- Other – Supply Drawing

#### Panels<sup>#</sup>

- Raised
- Flat

#### Glass

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered	<input type="checkbox"/> 3/16" Clear Firelight <sup>®</sup>
<input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Wire	
<input type="checkbox"/> N/A	<input type="checkbox"/> Other:	

<sup>#</sup>Panel dimensions will vary depending on prefit door size


## STILE & RAIL DOOR ELEVATIONS

JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_


JOB NAME: \_\_\_\_\_

STANDARDS:*	Top Rail: 6"	Stile: 6"	Mid Rail: 3"
	Bottom Rail: 10"	Mullion: 3"	Lock Rail: 8 3/4"


\* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.

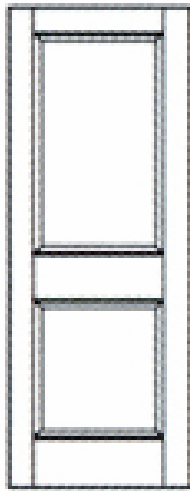


SS  
Square Door Top  
Square Top Panel

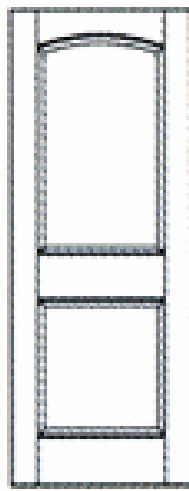


SA  
Square Door Top  
Arch Top Panel

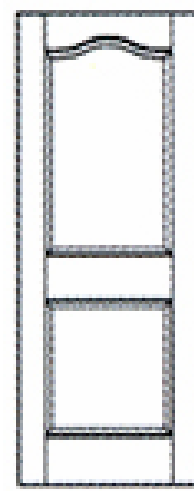


SC  
Square Top Door  
Colonial Top Panel

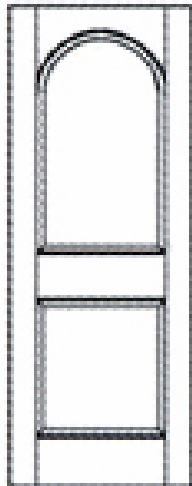

SR  
Square Door Top  
Radius Top Panel

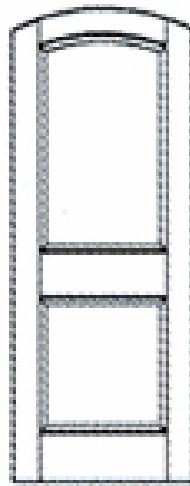

AA  
Arch Door Top  
Arch Top Panel

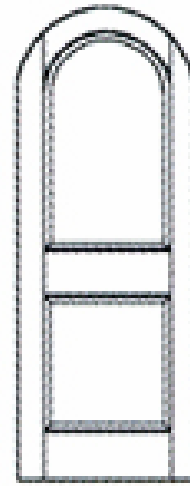

RR  
Radius Door Top  
Radius Top Panel