


FLAT OR RAISED PANELS

DIMENSIONS	DOOR TYPE	STILE & RAIL		STYLUS
		Opening Type	Single	Pair
	STC Rating	33-40	37	33
	Fire Rating	Non-Rated to 90-Min	Non-Rated	Non-Rated to 20-Min
	Door Thickness	1-3/4" or 2-1/4" (+-1/16")	1-3/4" (+-1/16")	1-3/4" (+-1/16")
	Panel Thickness	1-1/2" - 1-11/16"	1-11/16"	N/A
	Max Size	4'-6" x 8'-0" or 4'-0" x 7'-0"	96" x 97-3/8"	4'-0" x 10'-0"

STILES	Particleboard or double refined MDF - stile have hardwood edge or Fire Composite Material
RAILS	Particleboard, double refined MDF, or Fire Composite material - sealed top & bottom rails
PANELS	Particleboard, double refined MDF, or Fire Composite material
FINISH	WDMA TR-8/ System 10 Water-based UV cured acrylated polyurethane is standard. Primed and opaque coatings also available. VT color choices are available or custom color matching by submitting a physical sample (minimum 3" x 5")
STICKING, PANELS, & MOULDING OPTIONS	<ul style="list-style-type: none"> Standard & custom sticking / bead profiles available; Options available vary depending on fire rating Raised and flat panel Optional raised moulding
ADHESIVE	Type 1 adhesive
ACOUSTICAL RATING	STC 33-40. Consult VT for lite & glass approvals
QUALITY STANDARDS	WDMA I.S. 6A & AWS, Section 9 Quality Standards
WDMA PERFORMANCE LEVEL	Extra heavy duty, fire composite blocking not required for this door type
SUSTAINABILITY	<ul style="list-style-type: none"> Minimum 88% pre-consumer recycled content CARB Phase 2 / TSCA VI Compliant GREENGUARD GOLD FSC upon request, Consult VT for LEED documentation Environmental Product Declaration (EPD) Health Product Declaration (HPD)
DOOR WEIGHT	Varies by elevation & size; Please consult with VT
WARRANTY	Limited lifetime; Interior use only. View warranty

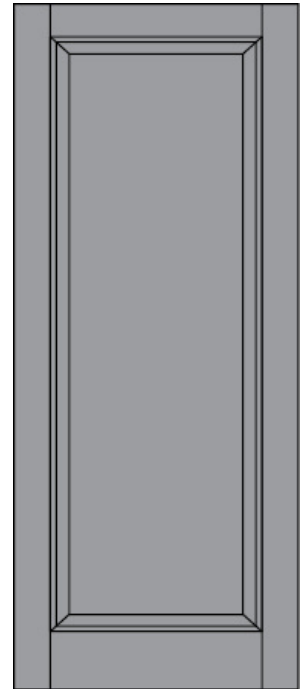

^ Custom sizes and options available, longer lead times may apply. Please refer to the Stile and Rail Component Dimensions Chart for more information * Component Dimensions are based on nominal opening size of door # Door height & width restrictions vary depending on fire rating restrictions ** Stile width may vary depending on lite opening, hardware, and/or fire rating

VT INDUSTRIES RESERVES THE RIGHT TO CHANGE DESIGN AND/OR DETAILS OF ITS PRODUCTS WITHOUT NOTICE.