






SPECIFICATION SHEET

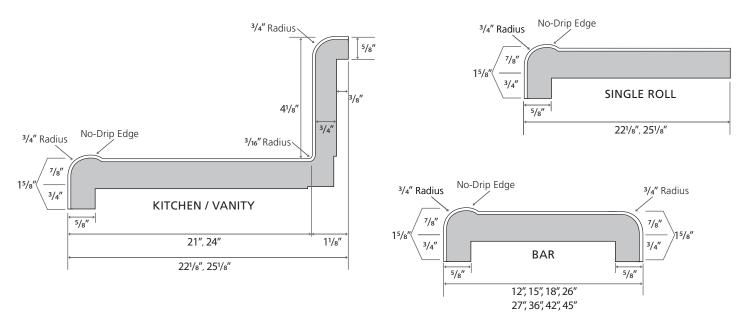

SPECIFICATIONS:

- Standard substrate is ¾" industrial-grade particleboard, available in 8', 10', and 12' lengths
- \bullet Standard postformed-grade laminate with a thickness of 0.042" + 0.002" 0.008"
- Both standard and special styles and sizes are suitable for all residential, commercial, institutional, or light-industrial applications
- Available as an environmentally friendly EQcountertops


















SPECIFICATION SHEET

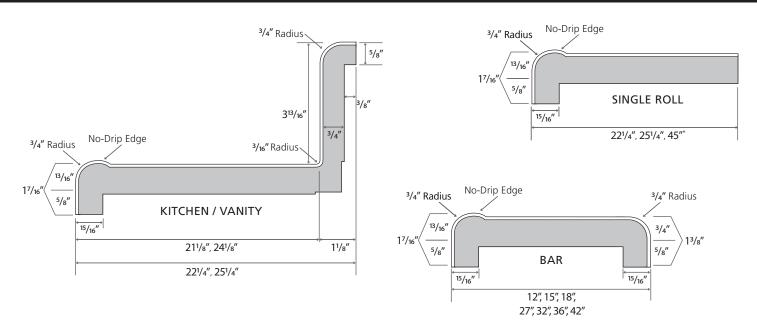

SPECIFICATIONS:

- Standard substrate is ¾" industrial-grade particleboard, available in 8', 10', and 12' lengths
- \bullet Standard postformed-grade laminate with a thickness of 0.042" + 0.002" 0.008"
- Both standard and special styles and sizes are suitable for all residential, commercial, institutional, or light-industrial applications
- Available as an environmentally friendly EQcountertops
















CAPRICE OREGON



SPECIFICATION SHEET

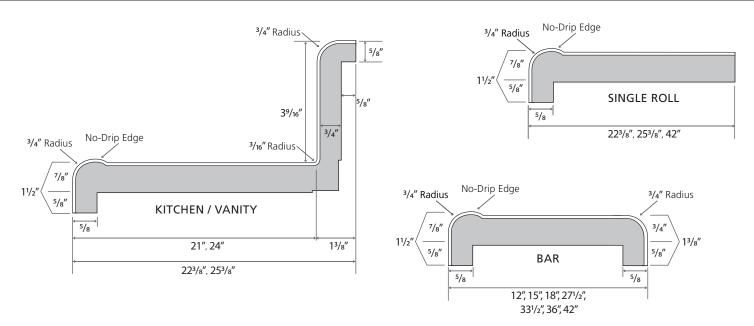

SPECIFICATIONS:

- Standard substrate is ¾" industrial-grade particleboard, available in 8', 10', and 12' lengths
- \bullet Standard postformed-grade laminate with a thickness of 0.042" + 0.002" 0.008"
- Both standard and special styles and sizes are suitable for all residential, commercial, institutional, or light-industrial applications
- Available as an environmentally friendly EQcountertops
















CAPRICE



SPECIFICATION SHEET

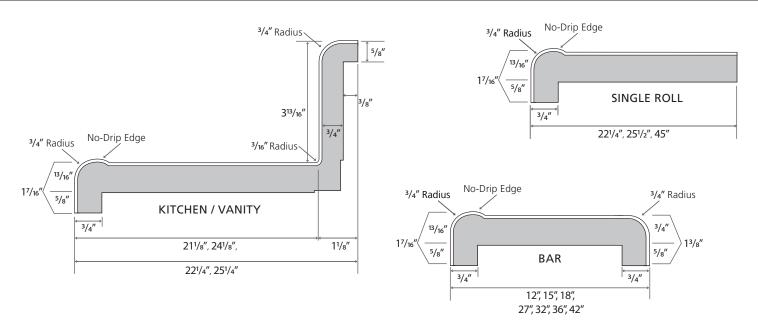

SPECIFICATIONS:

- \bullet Standard substrate is $3\!4''$ industrial-grade particleboard, available in 8', 10', and 12' lengths
- \bullet Standard postformed-grade laminate with a thickness of 0.042" + 0.002" 0.008"
- Both standard and special styles and sizes are suitable for all residential, commercial, institutional, or light-industrial applications
- Available as an environmentally friendly EQcountertops









